

CONSTRUCTION


- Top constructed of 1-1/8" particleboard with thermally fused melamine surface on both sides
- Thermally fused 3mm PVC edge banding
- Pre-drilled holes for easy leg assembly
- Four 16-gauge steel legs mounted on a 12-gauge steel plate, fully coated with powder coat finish
- Lower legs constructed of 16-gauge steel with powder coat finish, tapped at 1" intervals for adjustment
- Nickel plated nylon swivel glides standard

FINISHES


LAMINATES Available with matching or colored edge band



DRY ERASE LAMINATES Available with colored edge band

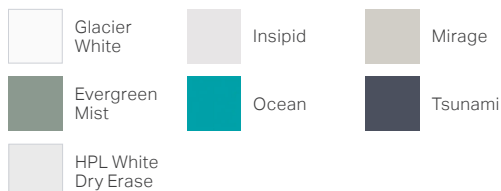

OPTIONAL EDGE BAND COLORS





METAL FRAME OPTIONS




DIMENSIONS

Model #	Width	Depth	Height	Weight	Freight Cts
38-2274-Axxx	30"	24"	21" - 30"	46 lbs	125
38-2274-Bxxx	30"	24"	17" - 24"	41 lbs	125

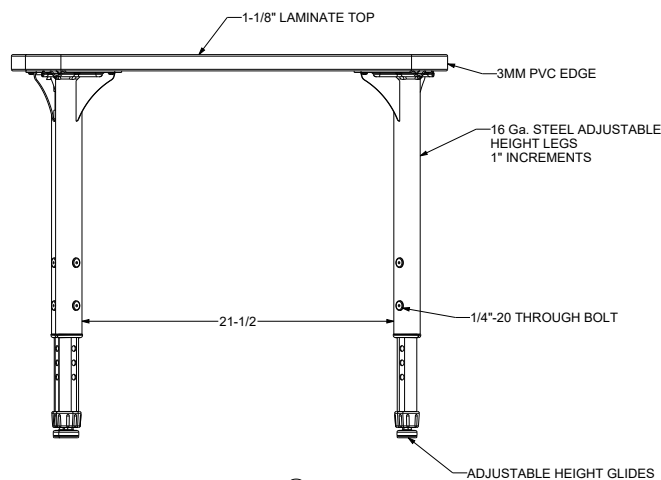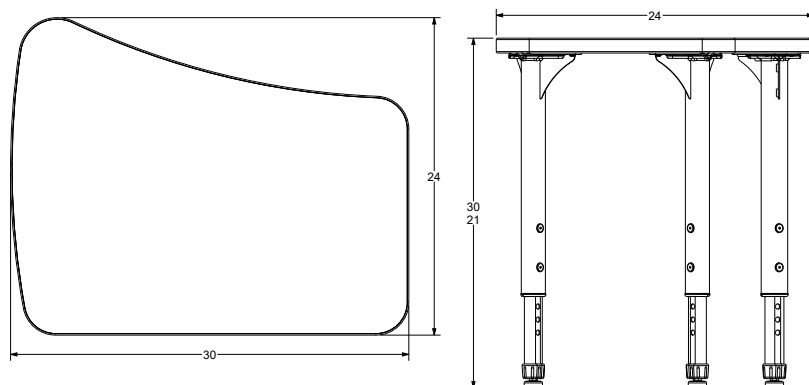

LEG SIZE OPTIONS

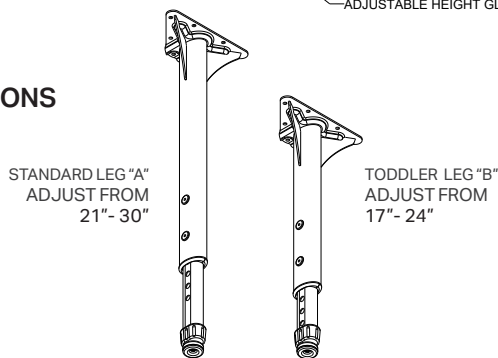

WARRANTY

10 Year Limited

CERTIFICATIONS

Worksurfaces are UL Greenguard Gold certified

This specification information is provided for general reference only and is subject to change without notice. While every effort has been made to ensure accuracy, Marco makes no warranties, express or implied, regarding the completeness or correctness of the details presented. Users should always verify specifications with the latest product documentation before making any purchasing decisions.