




### CONSTRUCTION


- Top constructed of 1-1/8" particleboard with thermally fused melamine surface on both sides
- Thermally fused 3mm PVC edge banding
- Pre-drilled holes for easy leg assembly
- Four 16-gauge steel legs mounted on a 12-gauge steel plate, fully coated with powder coat finish
- Lower legs constructed of 16-gauge steel with powder coat finish, tapped at 1" intervals for adjustment
- Nickel plated nylon swivel glides standard

### FINISHES


#### LAMINATES Available with matching or colored edge band



#### DRY ERASE LAMINATES Available with colored edge band

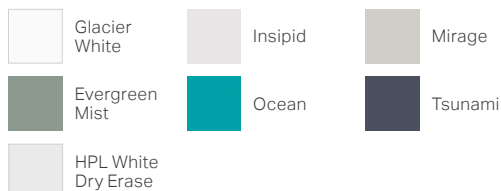

#### OPTIONAL EDGE BAND COLORS





#### METAL FRAME OPTIONS




### DIMENSIONS

| Model #      | Width | Depth | Height    | Weight | Freight Cts |
|--------------|-------|-------|-----------|--------|-------------|
| 38-2284-Axxx | 36"   | 23"   | 21" - 30" | 39 lbs | 125         |
| 38-2284-Bxxx | 36"   | 23"   | 17" - 24" | 34 lbs | 125         |

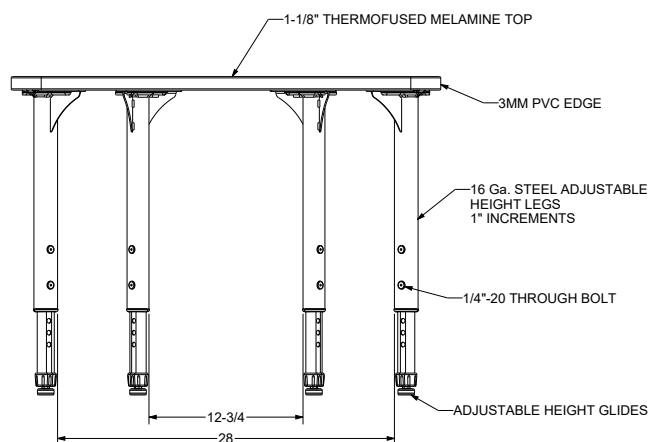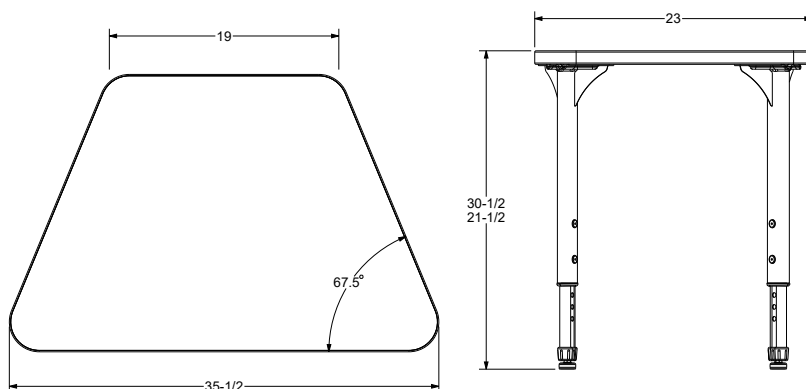

### LEG SIZE OPTIONS

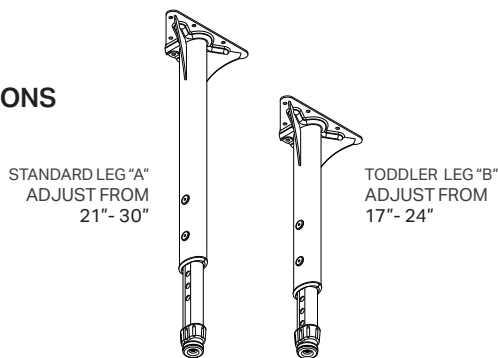

### WARRANTY

10 Year Limited

### CERTIFICATIONS

Worksurfaces are UL Greenguard Gold certified

This specification information is provided for general reference only and is subject to change without notice. While every effort has been made to ensure accuracy, Marco makes no warranties, express or implied, regarding the completeness or correctness of the details presented. Users should always verify specifications with the latest product documentation before making any purchasing decisions.